

iFORKS-32 XT

Completely wireless fork scale with extra thin forks

BENEFITS

- Extra thin forks for easy handling of low pallets
- Installation within 5 minutes
- Completely wireless through bluetooth: no cabling
- Fork power supply by **Li-ion** compact battery packs
- Digital calibration
- Load warning for tip and side loading
- Efficient power management
- Tested 1,000,000 cycles at 125% of capacity



Top quality
Plug & weigh



Lithium-ion

Step
into
the
future

RAVAS WeightsApp
Connect with your RAVAS Weighing System



FUNCTIONS

- Automatic and manual zero correction
- Gross/net weighing
- Totaling with sequence number
- ID-code entry (5 digits)
- Integrated level correction in the forks
- Internal clock for date and time
- On board: RS232 port connection for printer
Bluetooth 4.0 for RAVAS WeightsApp
- Optional: WiFi or Bluetooth module for data communication
- Tip loading error message with logging
- Sleep mode for the forks with automatic start up
- Overload protection 200% on mechanical construction; according ISO 2330

STANDARD SPECIFICATIONS

- Capacity: 2,500kg
- Graduation multirange: 0 - 1.000 kg in 1 kg steps
1.000 - 2.500 kg in 2 kg steps
- System tolerance: 0.1% of the load lifted
- Display: dual color (green / red), digit height 20mm, with backlight, 5 digits
- Red display: during errors when tip or side loading (weight on one fork)
- Signal transfer: Bluetooth 4.0
- Controls: 4 function keys, on/off key
- Protection class: IP65
- Dimensions housing: 60 x 77 x 182 mm (excl. bracket)


POWER SUPPLY

- Each fork has its own rechargeable Li-ion 3.7V / 5.2Ah battery pack. Autonomy 75 hours continuous use. Charger station included.
- Indicator powered by 4 AA-batteries. Autonomy ca. 50 hours continuous use. Power supply from truck battery optional (with data connection options reduced autonomy).
- Sleep function with automatic start up for the fork transmitters, auto shut-off function for the indicator.
- The operator can customize the power setting of the indicator in the 'user' menu.

OPTIONS*

- Legal for trade version, OIML III
- Thermal (6V or 12V) or matrix (12V) printer
- Bluetooth 2.0, WiFi or serial output
- Unimobile PDA or UniWin PC software
- Integrated power converter 24V-100V for indicator power supply via truck battery
- 12V-12V regulator for fixed power supply on diesel and gas trucks
- Electronic level correction sensor, compensates for up to 5° tilting of the mast
- WeighScan data collector
- Different fork lengths
- Extra rechargeable fork battery packs
- RDC, RAVAS Data Collector Software
- RIS, RAVAS Integration Software

DIMENSIONS IN MM

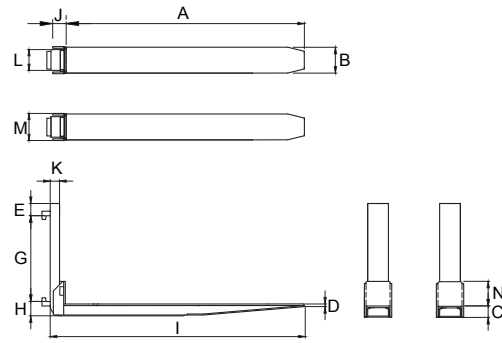

		2500 kg* FEM2
A	Fork length	1150
B	Fork width	155
C	Fork height	45
D	Thickness of the fork tip	10
E	Height above carriage plate	68
F	Height carriage plate	407
G	Distance between claws	418
H	Fork drop FEM A/B	76/152
I	Distance backside till fork tip	1220
J	Palletstop	70
K	Thickness base fork	35
L	Width of fork base	135
M	Width of pallet stop	180
N	Height of pallet stop	142
	Own weight per fork	67 kg

Tolerance +/- 2 mm; according ISO 2328

* Maximum capacity specified at load center point 500 mm



RAVAS Europe B.V.

Toepadweg 7, 5301 KA Zaltbommel, The Netherlands

T: +31 418 515220 E: salesoffice@ravas.com

WWW.RAVAS.COM

RAVAS