


# RVL

Carriage plate scale for counterbalanced trucks

## BENEFITS

- For use with rotators and clamps
- Max. tolerance 0,2% of the load lifted
- Data transfer to WMS or ERP systems
- Wireless version available (3200-BLE)

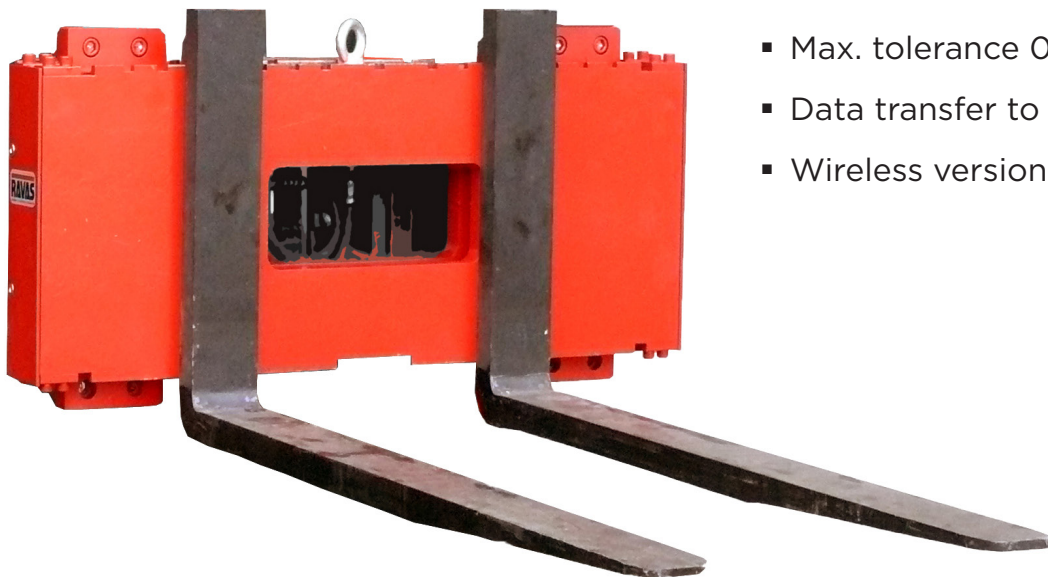

Top quality  
For industrial use



# RAVAS

## FUNCTIONS

- Functions of 3200, 5200 or 6100 weight indicator
- See indicator specification sheet


The RAVAS indicators have been developed exclusively for mobile applications. They are robust and resistant to shocks and vibrations. RAVAS indicators are compact and have a low power consumption. All indicators are dust and waterproof, according to norm IP65. RAVAS mobile scales can be used outdoors.

## STANDARD SPECIFICATIONS

- Capacity 2.500, 5.000 or 7.000 kg
- Graduation 2 kg at 2.500 kg capacity  
5 kg at 5.000 kg capacity  
10 kg at 7.000 kg capacity
- System tolerance 0,2% of the load lifted
- Overload protection 200%
- Protection class IP65 / NEMA 4
- Cabling via spiral cable
- Power supply from truck battery, via regulator



## DIMENSIONS IN MM

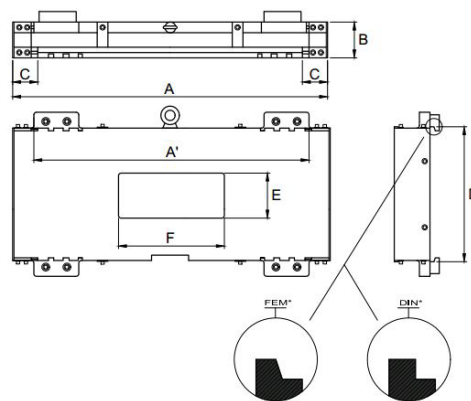

	2500 kg FEM2	5000 kg FEM3	7000 kg FEM4
A	1040	1100	1400
A1	870	900	1160
B	110	135	160
C	75	90	110
D	407	508	635
E	120	170	210
F	1/3 A	1/3 A	1/3 A
Own weight (kg)	225	450	650

Tolerances +/- 2 mm; according ISO 2328

## OPTIONS\*

- Thermal or matrix printer
- Bluetooth or WiFi output
- Cabling over rolls, integrated in the mast
- Wireless connection between RVL and indicator in cabin (RVL 3200-BLE)
- Smaller display graduations
- Different width
- Converter 80/48/36/24Vdc - 12Vdc
- Explosion proof version for use in hazardous areas, zone 1; ATEX certified
- RDC, RAVAS Data Collector Software
- RIS, RAVAS Integration Software



### RAVAS Europe B.V.

Veilingweg 17, 5301 KM Zaltbommel, The Netherlands

T: +31 418 515220 E: salesoffice@ravas.com

WWW.RAVAS.COM

