

RAVAS RPW EL


Scale for electric pallet trucks and order pickers



BENEFITS

- Fits all trucks
- Only 0.2 inch increase in fork height
- Weight transfer to truck terminal (optional)
- Data transfer (optional to WMS or ERP systems)
- For check weighing and preventing errors in order picking

Top quality
Also for retrofit

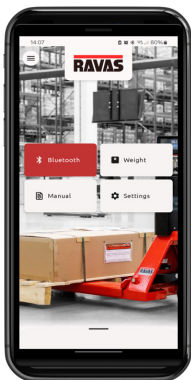

RAVAS Indicator App

RAVAS

FUNCTIONS

- Functions of 3200, 5200, 2100 (Exi) or Touch weight indicator
- See relevant indicator specification sheet

The RAVAS indicators have been developed exclusively for mobile applications. They are robust and resistant to shocks and vibrations. RAVAS indicators are compact and have a low power consumption. All indicators are dust and waterproof, according to norm IP65. RAVAS mobile scales can be used outdoors and on freight trucks.


STANDARD SPECIFICATIONS

- Capacity same as lifting capacity of the truck
- Load Cells 6 x 2,000 lb each
- Graduation 2 lbs
- Max. Tolerance 0.1 % of the load lifted
- Display LCD, digit height 0.7 inch, dual color
- Protection Class load cells IP67, indicator IP65
- Power Supply from truck battery

MODIFICATION OF THE TRUCK

All electric pallet trucks and order picking trucks can be equipped with the RAVAS RPW EL scale. The fork construction of the truck is mechanically modified, in order to mount the scale components with only 5 mm of added fork height. A scale indicator of your choice shows the weight on the forks and communicates with a truck terminal or warehouse management system if desired.

DIMENSIONS AFTER MODIFICATION

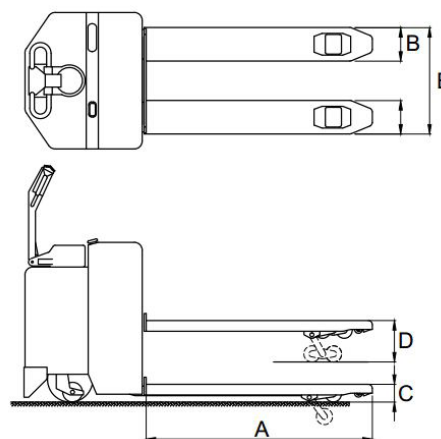

	Standard fork length	1150
A	Fork Length	+10
B	Fork width	+20
C	Minimum fork height	+5 mm
D	Maximum fork height	+5 mm
E	Width over the forks	+ 20
	Tollerances +/- 2 mm	

OPTIONS*

- Thermal or matrix printer
- RS232, and wireless data transfer to devices that have WiFi or Bluetooth® technology
- Legal for trade version, OIML III
- Smaller display graduations
- Different fork lengths and widths
- Fork adjustment for entering into closed pallets
- Stainless steel fork shoes
- Explosion proof version for use in hazardous areas, zone I; ATEX certified
- RDC, RAVAS Data Collector Software
- RIS, RAVAS Integration Software

RAVAS USA

1500 Enterprise Parkway, Twinsburg, Ohio 44087

T: 330.425.3092 E: salesoffice-usa@ravas.com

WWW.RAVAS.COM

