

RAVAS 2100 Exi INOX

Explosion proof pallet truck scale



BENEFITS

- Stainless steel chassis (AISI 316) and indicator housing (AISI 304)
- Hygienic design
- Accurate measurements under harsh conditions
- Durable and low maintenance
- Suitable for audits and inspections

Top quality

For hazardous areas

APPLICATIONS INOX WEIGHING SYSTEMS

- **Food industry**
suitable for refrigerated or packaged pallet transport
- **Fish and meat processing**
resistant to salt, moisture and intensive cleaning
- **Chemical industry**
safe for use with aggressive substances
- **Pharmaceutical sector**
can be used in sterile and controlled environments
- **Cleanrooms and laboratories**
no risk of contamination or pollution

RAVAS


FUNCTIONS

- Automatic and manual zero correction
- Gross/net weighing
- Automatic tare over the full scale. Pre-set tare maximum first range (200 kg)
- Error messages in display
- Automatic switch-off after 30 minutes of non-use
- Low battery warning in display

STANDARD SPECIFICATIONS

- Weighing capacity 2,000 kg
- Graduation multirange:
 - 0 - 200 kg: graduation 0.2 kg
 - 200 - 500 kg: graduation 0,5 kg
 - 500 - 2.000 kg: graduation 1 kg
- Max. tolerance 0.1% of the load lifted
- System certification II 2 G Ex ib IIB T4 Gb & II 2 D Ex ib IIIC T135°C Db, approval number DEKRA 13ATEX 0044
- Display LCD, digit height 18 mm
- Keypad foil keypad, 3 function keys, on/off key, resistant to chemicals
- Protection class load cells IP67, indicator IP65
- Chassis stainless steel AISI 316
- Other steel parts stainless steel AISI 304 bead blasted
- Battery intrinsically safe, approval number DEKRA 13ATEX 0043, 8Vdc/3.5 Ah, rechargeable, exchangeable, maintenance free
- Battery life 100 hours, low battery indication
- Charger 230V/8Vdc - 1 A; for use outside hazardous zone
- Charging time approximately 8 hours
- Steering wheels rubber, antistatic
- Loading wheels nylon, tandem
- Pump quick lift, stainless steel

DIMENSIONS IN MM

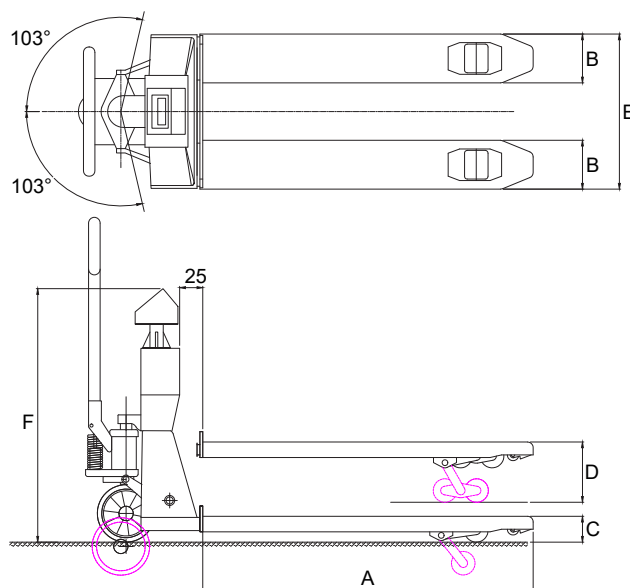

Professional

A	Fork length	1150
B	Fork width	170
C	Minimum fork height	90
D	Maximum fork height	202
E	Width over forks	540
F	Height to top indicator	

For approved versions, class OIML III : European approval no. T2782, switch-of of display when tilting more than 2°. Graduation: multirange 0.5/1 kg, or one of the following fixed graduations:

- 1.000 divisions: 1,0/1.000 kg or 2,0/2.000 kg
- 2.000 divisions: 0,5/1.000 kg or 1,0/2.000 kg

OPTIONS*

- Extra exchangeable battery pack
- Legal for trade version, OIML III
- Rotating indicator
- Big push buttons for use with gloves

RAVAS Europe B.V.

Veilingweg 17, 5301 KM Zaltbommel, The Netherlands

T: +31 418 515220 E: salesoffice@ravas.com

WWW.RAVAS.COM

