

RAVAS ProLine Touch


Pallet truck scale with programmable touch screen indicator



BENEFITS

- Superb accuracy
- Rotating touch screen indicator
- Programmable user interface
- Advanced scale functions, i.e. dosing
- USB port for data capture
- 12 hours battery life

The hi-tech standard
Extremely accurate

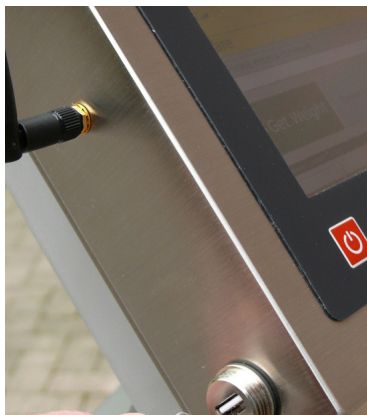

RAVAS


FUNCTIONS

- Automatic and manual zero correction
- Gross/net weighing
- Automatic and manual tare via touch screen
- Entry of alphanumeric codes
- Totalling with sequence number
- Piece counting by sampling or calculation of piece weights
- Error messages in display
- Internal clock

STANDARD SPECIFICATIONS

- Weighing capacity 2.000 kg
- Graduation multirange:
 - 0 - 200 kg: graduation 0,1 kg
 - 200 - 400 kg: graduation 0,2 kg
 - 400 - 2.000 kg: graduation 0,5 kg
- Max. tolerance 0.08% of the load lifted
- Display 18 cm / 7.1 inch, high resolution
- touch screen
- Protection class load cells IP67, indicator IP65
- Power consumption 360 mA
- Battery 12V, by 4 exchangeable battery modules 6V-4,8Ah
- Battery life 12 hours, charging time 6 hours
- Charger 230V NiMH charger included
- Steering wheels rubber
- Loading wheels polyurethane, tandem
- Colour red (RAL 3000), epoxy painted
- Colour INOX stainless steel
- Own weight 180 kg
- Pump ergonomic lift

DIMENSIONS IN MM

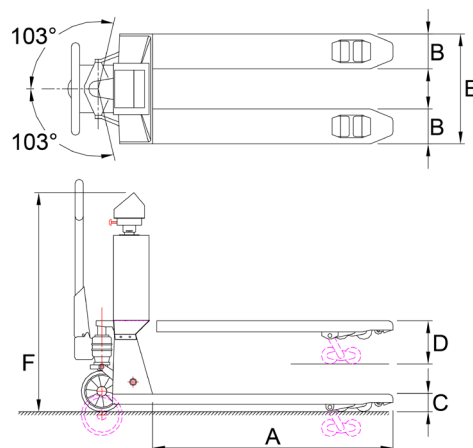

	Standard	Premium*
A Fork length	1150	950 - 2400
B Fork width	160	155
C Minimum fork height	90	86
Minimum clearance	22	
D Maximum fork height	205	176
Lifting height	115	
E Width over forks	550	530
F Height to top indicator	1185	600

Tolerance +/- 2 mm

* Selected chassis for non-standard dimensions



Management
System
ISO 9001:2015
ISO 14001:2015
ISO 45001:2018
www.tuv.com
ID 0000037200

PREMIUM OPTIONS*

- Client specific software
- 2 extra exchangeable batteries
- Built-in thermal printer
- Wireless output
- Legal for trade version, OIML III
- 0.1 kg graduation, maximum 1,000 kg capacity
- Stainless steel fork shoes or chassis

RAVAS Europe B.V.

Veilingweg 17, 5301 KM Zaltbommel, The Netherlands

T: +31 418 515220 E: salesoffice@ravas.com

WWW.RAVAS.COM

