

# RAVAS 5200

Pallet truck scale with touch screen indicator



## BENEFITS

- 5 inch touch screen with 25 mm high digits
- Power supply via Li-ion battery pack
- Optimal ease of use, only active keys visible
- Customer specific routines can be programmed
- Integrated data connectivity
- Counting scale functionality
- Level compensation to 3 degrees

Top quality

Customized functions



# RAVAS


## FUNCTIONS

- Automatic and manual zero correction
- Gross / net weighing
- Tare memory for 10 values
- ID-code entry for 4 ID-codes with 10 preset codes (each max.14 characters alpha-numeric)
- 10 totalizing registers
- Internal clock for date and time
- On board: RS232 port connection for printer  
USB output for data transfer (with USB Stick)  
Free COM1 for Wifi or RS232  
Free COM2 for Wifi or RS232
- The USB output can also be used to connect a bar-code scanner
- Connectivity for RAVAS Indicator App
- Sleep modes for saving power.
- Error message in display incl. logging

## STANDARD SPECIFICATIONS

- Capacity 2.000 kg (2.500 kg or 3.000 kg optional)
- Graduation multi-range  
0 - 200 kg; graduation 0,2 kg  
200 - 500 kg; graduation 0,5 kg  
500 - 2.000 kg; graduation 1 kg
- Max. system tolerance 0.1 % of applied load
- Display full-colour 5" touch display with 25 mm high digits
- Power consumption 12V -160 mA
- Power supply Li-ion battery pack 14.8V / 5Ah incl. charger
- Autonomy 25 hours continuous use (50 hours with sleep modes)
- Keyboard display mode defines the available keys, on/off key
- Protection class Loadcells IP 67, indicator IP65
- Indicator mounting rotating and tiltable
- Steering wheels rubber
- Loading wheels tandem polyurethane
- Colour red (RAL3000) epoxy painted
- Pump quick lift
- Own weight 125 kg

## DIMENSIONS IN MM

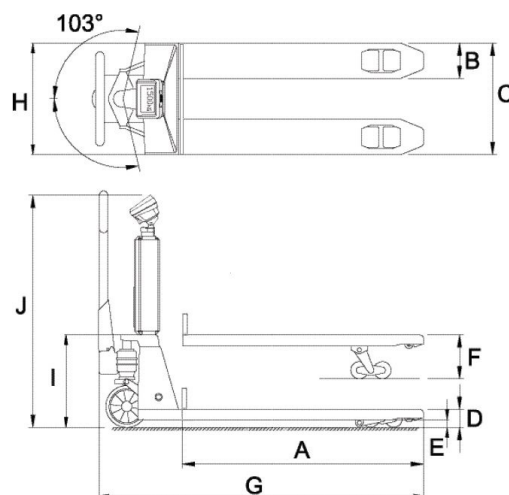

|                           | Standard | Premium    |
|---------------------------|----------|------------|
| A Fork length             | 1150     | 950 - 2400 |
| B Fork width              | 170      | 155        |
| C Width over forks        | 540      | 530        |
| D Minimum fork height     | 90       | 86         |
| E Minimum clearance       | 22       |            |
| F Maximum fork height     | 180      | 176        |
| Lifting height            | 90       |            |
| G Overall length          | 1575     |            |
| H Chassis width           | 540      |            |
| I Minimal chassis height  | 415      |            |
| J Height to top indicator | 990      | 600        |

Tolerance +/- 2 mm

\* Selected chassis for non-standard dimensions



## OPTIONS\*

- Legal for trade version OIML III
- Thermal or matrix printer 12V
- Thermal label printer
- Data transfer to devices that have Bluetooth® technology
- Reference scale via RS232 (for more accurate piece counting)
- Footbrake
- 1D USB bar-code scanner, not in combination with legal for trade
- Additional Li-ion battery pack
- RDC, RAVAS Data Collector Software
- RIS, RAVAS Integration Software

### RAVAS Europe B.V.

Veilingweg 17, 5301 KM Zaltbommel, The Netherlands

T: +31 418 515220 E: salesoffice@ravas.com

WWW.RAVAS.COM

