

RAVAS RWB DE

Weighing Beams

MOBILE
WEIGHING
SYSTEM


The RAVAS RWB DE consists of two movable weighing beams. It has an extremely solid construction which is practically undestructable. Despite its solid looks, the beams are lightweight and easy to move.

The weighing system has a high accuracy with a maximum error of 0,1% of the applied weight. In addition to the standard dimensions, other dimensions are offered on demand.

RAVAS INDICATORS

The RAVAS RWB DE can be delivered with various types of RAVAS indicators. Each indicator has its own specific functions and can be used in various applications. The RAVAS indicators have been developed especially for mobile applications. Therefore they have a robust construction and are resistant to shocks and vibrations. RAVAS indicators are compact, due to the use of SMD techniques. All indicators are dust and waterproof according to norm IP65, thus enabling use in the open.

Available with different type of indicators, both cabled or wireless

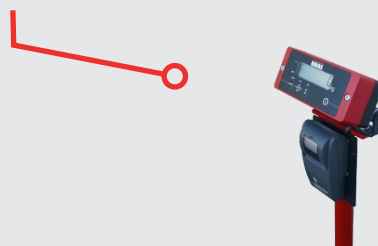

STANDARD SPECIFICATIONS

- Weighing capacity 3,000, 6,000 or 10,000 kg
- Multirange 0.2 - 5 kg
- Maximum error 0.1% of the applied weight
- Functionality determined by indicator
(see relevant specification sheet)
- Protection indicator IP65
- Protection load cells and cabling IP67
- Indicator on wall bracket
- Equipped with rubber support
- Power supply: 230 V
- Colour: red (RAL 3000)

OPTIONS WEIGHING SYSTEM*


* The options depend on the chosen type of indicator

- Available with indicator 1100, 3200 and 5200
- Smaller graduations for a more precise indication
- Approved version OIML class III, certificate T2938
- Thermal or matrix printer in separate enclosure
- Wireless connection between scale and indicator
- Second display
- Cold storage preparation
- Relay output for filling applications
- Tripod
- A U-shaped movable weighing beam
(model **RWB ND**)



The RAVAS **RWB ND** model

DIMENSIONS IN MM

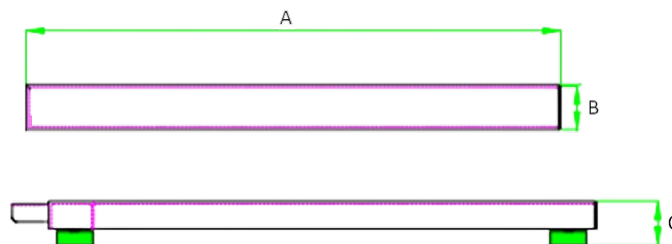

	Capacity (kg)	3,000			6,000	10,000
A	Length	1260	1560	2060	1560	2060
B	Width	120				150
C	Height	82 - 85				

MULTIRANGE IN KG

	Capacity (kg)		
Indicator	3,000	6,000	10,000
1100	0.5 / 1	2 / 5	2 / 5 / 10
3200	0.2 / 0.5 / 1	2 / 5	2 / 5 / 10
5200	0.2 / 0.5 / 1	2 / 5	2 / 5 / 10



The RAVAS **RWB DE** model with tripod