

RAVAS ProLine Touch INOX

Pallet truck scale with programmable touch screen indicator



Note: Image of RAVAS ProLine Touch Exi INOX not shown in this document.

BENEFITS

- Superb accuracy
- Rotating touch screen indicator
- Programmable user interface
- Advanced scale functions, i.e. dosing
- USB port for data capture
- 12 hours battery life
- Stainless steel chassis (AISI 316) and indicator housing (AISI 304)

The hi-tech standard
Extremely accurate

APPLICATIONS INOX WEIGHING SYSTEMS

- **Food industry:** suitable for refrigerated or packaged pallet transport.
- **Fish and meat processing:** resistant to salt, moisture and intensive cleaning.
- **Chemical industry:** safe for use with aggressive substances.
- **Pharmaceutical sector:** can be used in sterile and controlled environments.
- **Cleanrooms and laboratories:** no risk of contamination or pollution.

The RAVAS logo consists of a thick red horizontal bar above the word "RAVAS" in a bold, black, sans-serif font.


FUNCTIONS

- Automatic and manual zero correction
- Gross/net weighing
- Automatic and manual tare via touch screen
- Entry of alphanumeric codes
- Totalling with sequence number
- Piece counting by sampling or calculation of piece weights
- Error messages in display
- Internal clock

STANDARD SPECIFICATIONS

- Weighing capacity 2.000 kg
- Graduation multirange:
 - 0 - 200 kg: graduation 0,1 kg
 - 200 - 400 kg: graduation 0,2 kg
 - 400 - 2.000 kg: graduation 0,5 kg
- Max. tolerance 0.08% of the load lifted
- Display 18 cm / 7.1 inch, high resolution
- touch screen
- Protection class load cells IP67, indicator IP65
- Power consumption 360 mA
- Battery 12V, by 4 exchangeable battery modules 6V-4,8Ah
- Battery life 12 hours, charging time 6 hours
- Charger 230V NiMH charger included
- Steering wheels nylon
- Loading wheels nylon, tandem
- Colour stainless steel
- Pump ergonomic lift

DIMENSIONS IN MM

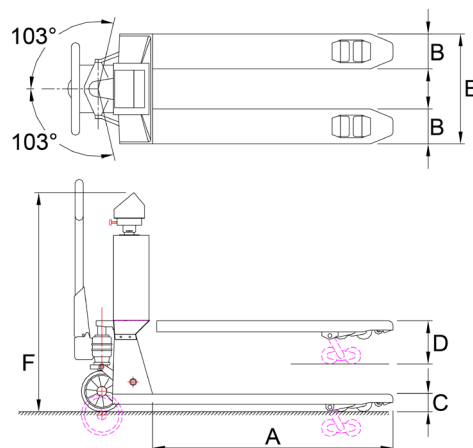

Professional

A	Fork length	1150
B	Fork width	170
C	Minimum fork height	90
D	Maximum fork height	202
E	Width over forks	540
F	Height to top indicator	



Management
System
ISO 9001:2015
ISO 14001:2015
ISO 45001:2018
www.tuv.com
ID 0000037200

PREMIUM OPTIONS*

- Client specific software
- 2 extra exchangeable batteries
- Built-in thermal printer
- Wireless output
- Legal for trade version, OIML III
- 0.1 kg graduation, maximum 1,000 kg capacity

RAVAS Europe B.V.

Veilingweg 17, 5301 KM Zaltbommel, The Netherlands

T: +31 418 515220 E: salesoffice@ravas.com

WWW.RAVAS.COM

RAVAS